




BAUER COMMUNICATIONS, INC.

PRECISION TRANSFORMERS
By Reichenbach Engineering

line in
15K : 15K
+16 dBu

RE-11P-1PC

LINE INPUT TRANSFORMER

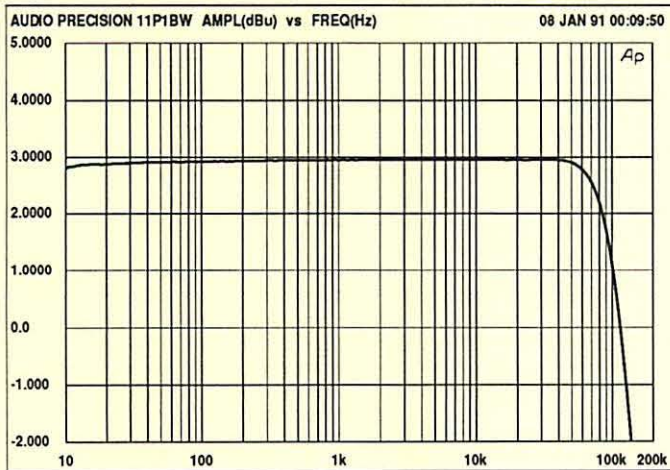


RE-11P-1PC MAGNITUDE RESPONSE

- **Impedance Ratio:** 15K ohms to 15K ohms
- **Primary source Impedance:** 600 ohms or less
- **Turns Ratio:** 1:1
- **20Hz Max Input Level:** +16 dBu
- **Bandwidth (-3db point):** 85 kHz
- **Magnetic Shield:** 30db case with separate lead (7)
- **Faraday Shield:** 1 with separate lead (6)
- **Recommended Load:** 10K ohms
- **RC network:** For 15K use 30K + 270pf.
For 100K use 13K + 620pf.

NOTE: All transformers formerly sold under the *Jensen Transformers* name are the design and manufacture of Reichenbach Engineering.

Specifications subject to change without notice or obligation.

©1991 BCI

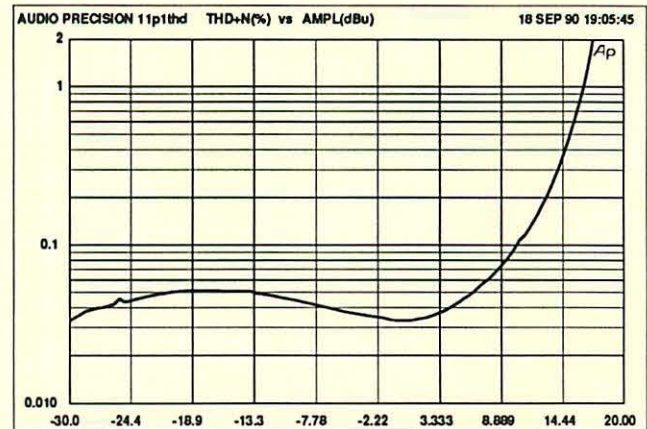

RE-11P-1PC 20Hz DISTORTION

